


AKO Three-Way Temperature Regulator Type Series 226.0221 with manual override deliverable sizes: 40, 50, 65, 80, 100, 125, 150 mm

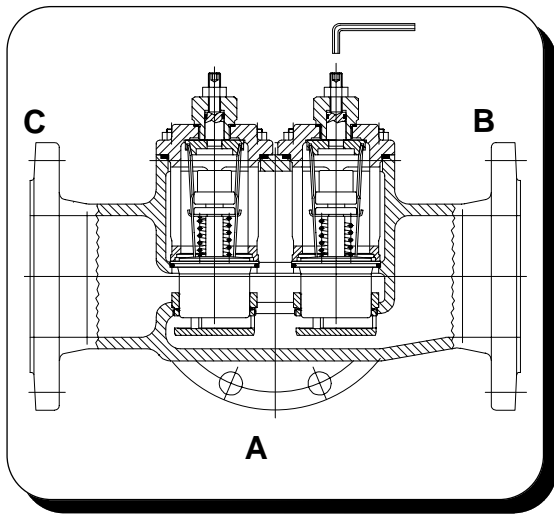

Technical Data

Material:	
- Body	spheroidal graphit GGG 40
- Inner Parts	SS/Ms
Thermostat	237.0120-xxx
Operation Temperature	bis 120 °C
Operation Pressure	up to 16 bar
adm. Differential Pressure	up to 16 bar
Nominal Pressure	PN 16
Connection	Flange DIN 2533 E
Manual override	

Installation:

The installation can be done selectively as follows:

as divider

path A: from motor

path B: to bypass

path C: to cooler

as mixing valve

path C: from cooler

path B: from bypass

path A: to motor

The paths have been marked on the connections.

The temperature regulator may be installed in all positions.


deliverable temperature ranges:

05 - 15°C	32 - 41°C	43 - 54°C	66 - 74°C	77 - 85 °C	88 - 99 °C
14 - 26°C	35 - 43°C	51 - 60°C	68 - 78°C	79 - 88 °C	93 - 103 °C
20 - 30°C	37 - 47°C	57 - 66°C	71 - 79 °C	82 - 93 °C	102 - 113 °C
27 - 37°C	39 - 50°C	62 - 71°C	74 - 82 °C	85 - 96 °C	

AKO Temperature Regulators are suitable for the stabilization of Temperatures of media (e. g. water, oils, etc.) and are even applicable as dividing units or mixing valves. Depending on their construction they are distinguished by their low need of maintenance, particular operating convenience and resistance to pressure. A replacement of innerparts is possible on the spot without having to remove the regulating valve from the piping. A faulty assembly can be excluded. The temperature regulators could be assembled in each fitting position.

AKO Temperature Regulators are being equipped with easily replaceable internal wax-filled thermostats that absorb the temperature of the medium surrounding them at the measurement point namely into expansion and thus a change in path or length (the valve stroke). AKO Temperature Regulators do not require any auxiliary energy. At rising temperature and on excess of the opening temperature, the tube slide is being lifted off of the valve seat and opening path A to C, with the path A to B locking simultaneously in the same ratio. The change is being performed in proportion to the change of temperature of the passing medium.

Manual Override: In order to meet the security demands of the classification societies for greater safety, the manual override was installed. It is not intended for setting the temperature when the regulating valve runs automatically. The manual resetting facility makes it possible to use the control valve as a manual change-over valve. The taper can be brought into any desired position by means of an adjusting screw, so that any operating temperature can be set by observing the thermometer.

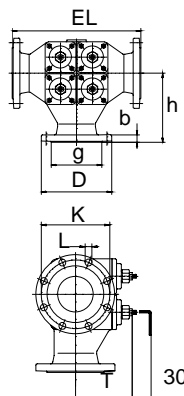

order-no.	DN	D	g	b	h	T	EL	K	L	quantity of thermostats	kg
226.0221-040	40	150	88	18	102	172	178	110	4x18	1	15,5
226.0221-050	50	165	102	20	150	165	225	125	4x18	1	18,0
226.0221-065	65	185	122	20	165	146	254	145	4x18	2	28,5
226.0221-080	80	200	138	22	171	138	267	160	8x18	2	33,0
226.0221-100	100	220	158	24	217	155	403	180	8x18	4	56,0
226.0221-125	125	250	188	26	241	212	489	210	8x18	6	85,0
226.0221-150	150	285	212	26	254	212	489	240	8x22	8	104,0