


AKO Temperature Regulator selfactuated

BT 227.0520-GB



AKO Three-Way-Temperature Regulator Type Series 227.0520

Deliverable sizes: 40, 50, 65, 80, 100, 125, 150 mm

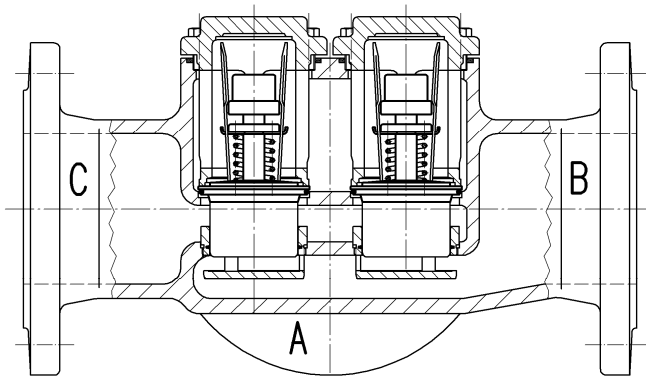

Technical Data:

Material:	
- Body	CuSn10-C
- Inner Parts	SS / bronze
Thermostat	237.0520-xxx-0
Sealing Kit	NBR
Operation Pressure	max. 16 bar
adm. Differential Pressure	max. 16 bar
Nominal Pressure	PN 16
Connection	Flange EN 1092-3 form B

Installation:

The installation can be done selectively as follows:

as divider

path A: from motor
path B: to bypass
path C: to cooler

as mixing valve

path C: from cooler
path B: from bypass
path A: to motor

The paths have been marked on the connections.
The temperature regulator may be installed in all position.

Deliverable temperature ranges:			
10 - 17 °C	32 - 41 °C	41 - 50 °C	
20 - 30 °C	35 - 43 °C		
27 - 37 °C	38 - 47 °C		

Max. continuous temperature 25 °C above fully open temperature.


Application

AKO Temperature Regulators are suitable for the stabilization of temperatures of media (e. g. water, oils, etc.) and are even applicable as dividing units or mixing valves. Depending on their construction they are distinguished by their low need of maintenance, particular operating convenience and resistance to pressure. A replacement of inner parts is possible on the spot without having to remove the regulating valve from the piping. A faulty assembly can be excluded. The temperature regulators could be assembled in each fitting position.

Function

AKO Temperature Regulators are being equipped with easily replaceable internal wax-filled thermostats that absorb the temperature of the medium surrounding them at the measurement point namely into expansion and thus a change in path or length (the valve stroke). AKO Temperature Regulators do not require any auxiliary energy. At rising temperature and on excess of the opening temperature, the tube slider is being lifted off on the valve seat and opening path A to C, with the path A to B locking simultaneously in the same ratio. The change is being performed in proportion to the change of temperature of the passing medium.

Manual Override: In order to meet the security demands of the classification societies for great safety, the manual override was installed. It is not intended for setting the temperature when the regulating valve runs automatically. The manual resetting facility makes it possible to use the control valve as a manual change-over valve. The taper can be brought into any desired position by means of an adjusting screw, so that any operating temperature can be set by observing the thermometer.

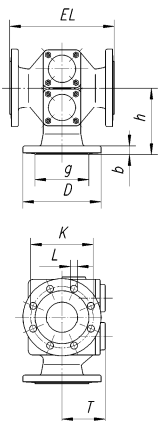

Order-no.	DN	D [mm]	g [mm]	b [mm]	h [mm]	T [mm]	EL [mm]	K [mm]	L [mm]	pieces of thermostats	weight [kg]	KVs [m³/h]
227.0520-040	40	150	88	18	102	142	178	110	4x18	1	15,5	24,64
227.0520-050	50	165	102	20	150	135	225	125	4x18	1	18,0	38,80
227.0520-065	65	185	122	20	165	116	254	145	4x18	2	30,0	62,80
227.0520-080	80	200	138	22	171	108	267	160	8x18	2	33,0	85,95
227.0520-100	100	220	158	24	217	125	403	180	8x18	4	51,0	156,70
227.0520-125	125	250	188	26	241	182	489	210	8x18	6	78,0	212,00
227.0520-150	150	285	212	26	254	182	489	240	8x22	8	94,0	299,00